







DIMENSIONI / DIMENSIONS




	LARGHEZZA / width	ALTEZZA / height
1A standard	Et: 68 - 78 - 88 - 98	215 - 245
1A su misura /customized	Et: fino a/until 108	fino a/until 245
2A standard	Et: 128 - 148 - 168 - 188	215 - 245
2A su misura /customized	Et: fino a/until 208	fino a/until 245


Et = misura d'ordine / order measure

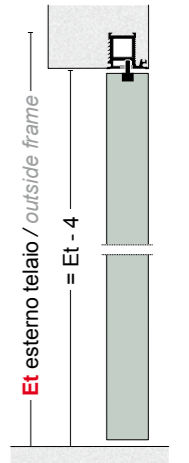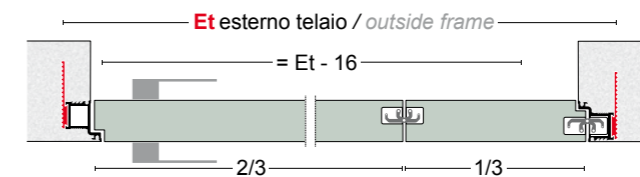

VERSO DI APERTURA / OPENING DIRECTION

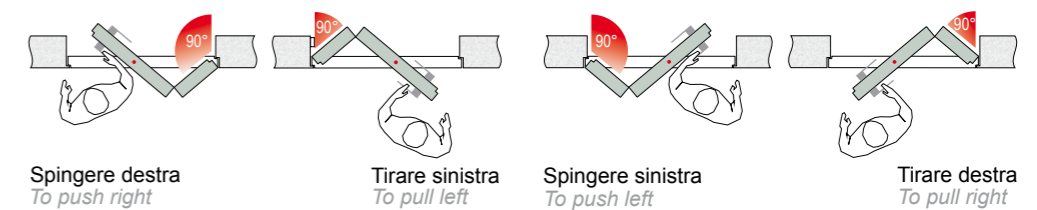

FORNITURA DI SERIE / SUPPLY OF SERIES

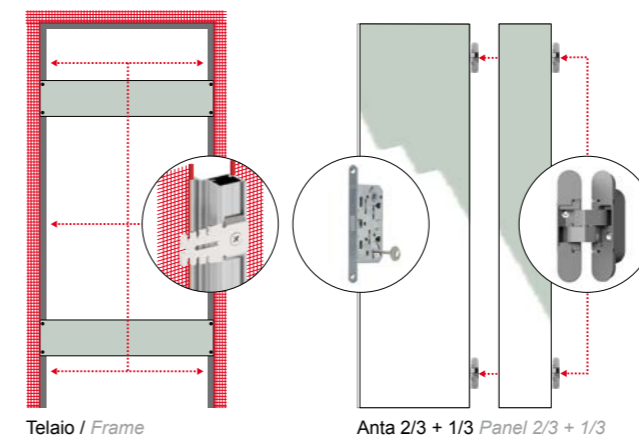

Porta filomuro apertura pieghevole, applicabile su pareti in muratura e cartongesso di qualsiasi spessore, disponibile nelle misure standard e su misura. La fornitura di serie comprende: telaio in alluminio estruso da 44 mm in finitura ruvida tipo intonaco sovraverniciabile completo di staffe di fissaggio. Anta tamburata pieghevole rivestita nelle due facce e nei quattro bordi con carta melaminica sovraverniciabile, completa di guarnizione di battuta. Serratura magnetica "patent" (maniglia esclusa) e cerniere registrabili sui 3 assi.

Folding flush with the wall door, can be applied on brick or plastered walls of any thickness, available in standard measures or customized. The delivery includes: Extruded aluminium frame 44mm in rough finish completely with fixing brackets, hollowed folding panel covered and edged in two faces and four sides with melaminic paper, with jamb gasket, magnetic lock "patent" (handle not included), hidden hinges adjustable on 3 axes.

PERSONALIZZAZIONI / CUSTOMIZATIONS



Porta filomuro MYA apertura pieghevole spingere sinistra, anta in finitura intonaco, maniglia Tratto in finitura Ral 9010. Sportello filomuro KIUSO apertura battente tirare destra con chiusura a scomparsa push-pull, anta a specchio. A fianco: esempio di installazione porta filomuro con cornici in gesso applicate al perimetro del telaio.

Folding flush with the wall MYA door push left, panel in plaster finish, Tratto handle in RAL 9010 finish. Flush with the wall cage KIUSO opening pull right with push-open system, mirror panel. Next to: example of flush with the wall door application with plaster cornices applied around the frame.

