EXECUTIVE COLLECTION

CARATTERISTICHE TECNICHE
TECHNICAL SPECIFICATIONS

EXECUTIVE/PV
Variante con telaio e bordo anta in PVC, anta in laminato plastico.

Version with frame and door edge in PVC, door in plastic laminated.

TELAIO in PVC estruso antiurto pluri-camere.
(R) Rinforzi con barre di PVC all'interno delle camere a supporto delle cerniere e delle viti di fissaggio.
(P) Parete zigrinata per eventuale fissaggio con schiume poliuretaniche.
(G) Guarnizione di battuta dell'anta in gomma.
(M) Mostre coprifilo in PVC estruso dello stesso colore del telaio o di colore diverso su richiesta, dotate di scanalature millerighe per la regolazione ed il fissaggio a scatto nelle sedi del telaio. Fornite di serie già tagliate a misura con angoli a 45°.
(S) Squadrette di allineamento.

ANTA di spessore 40 mm composta in laminato plastico antigraffio idroresistente supportato, colori e finiture Tipo Abet cartella Print.
(N) Nucleo in Polistirene espanso idrorepellente e autoestinguente in classe uno.
(R) Rinforzi con barre di PVC estruso sul perimetro a supporto delle cerniere e della serratura.
(B) Bordo anta in PVC estruso antiurto dello stesso colore del telaio o colore diverso su richiesta, posizionato a sormonto sul perimetro dell'anta.
(C) Cornici vetro in PVC estruso dello stesso colore del telaio o colore diverso su richiesta.
(V) Vetro stratificato di spessore 6 mm 3+3 fornito su richiesta nelle diverse finiture.

FERRAMENTA:
(Cr) Cerniere registrabili su 2 assi tipo "Anuba" in acciaio cromato satinato.
(Sr) Serratura a chiusura meccanica con chiave "Patent" di serie o altre serrature o nottolino Wc libero/occupato su richiesta.
(Mr) Maniglia fornita separatamente su richiesta.

FRAME *extruded PVC impact resistant multi-cavity.*
(R) Reinforcements *with internal PVC bars to the cavity to support the hinges and the fixing screws.*
(P) Knurled side *for possible polyurethane foam application.*
(G) Rubber Gasket *on door edge.*
(M) Frames backlining *extruded PVC, equipped with needlecord grooves for the regulation and the snap fastening in the seats of the frame. Provided as standard already cut to size with 45 ° corners.*
(S) Alignment brackets.

DOOR PANEL *40 mm thick and made in Plastic Laminate supported non-scratch water resistant, colors and finishes type Abet Print chart.*
(N) Nucleus *polystyrene foam water-repellent and self-extinguishing in class one.*
(R) Reinforcement bars *of extruded PVC on the perimeter to support the hinges and the lock.*
(B) Door edge *extruded PVC shockproof of the same color of the frame or different color on request, positioned to overlap on the perimeter of the door.*
(C) Frames glass *in extruded PVC of the same color of the frame or different color on request.*
(V) *Stratified transparent* ***glass*** *6 mm (3+3) or different type of glass upon request.*

HARDWARE:
Cr) Hinges *adjustable on both axes "Anuba" type in satinized chrome steel.*
(Sr) Mechanical lock *closure with key "Patent" as standard or any other lock or pawl WC free/busy on request.*
(Mr) Handle *provided separately on request.*

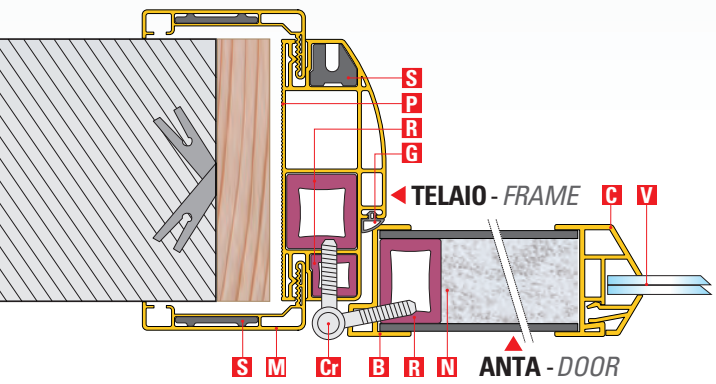

Pannello in versione Silent con membrana acustica a richiesta.

Panel Silent version with acoustic membrane on request.